TABLE 3C THOROUGHFARE ASSEMBLIES

ST-57-20-BL

- Bicycle Lane
- Pavement Width
- Right of Way Width
- Streetscape Type

STREETSCAPE TYPES

EX: Expressway
AR: Arterial
CO: Collector
CN: Connector
BV: Boulevard
AV: Avenue
CS: Commercial Street
US: Urban Street
ST: Street
RD: Road
AL: Rear Alley
LA: Rear Lane
BT: Bicycle Trail
BL: Bicycle Lane
BR: Bicycle Route

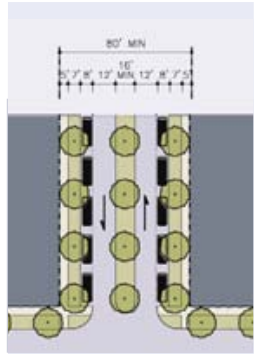

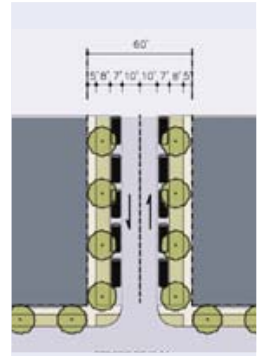

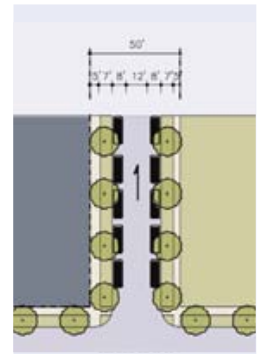

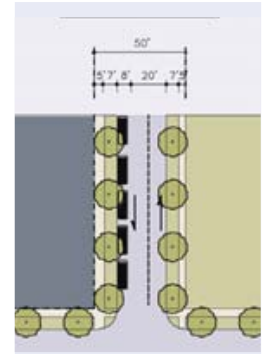

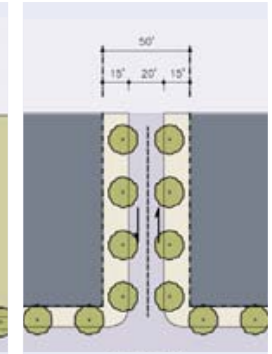

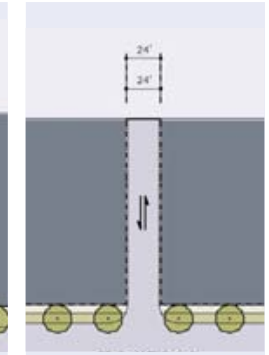

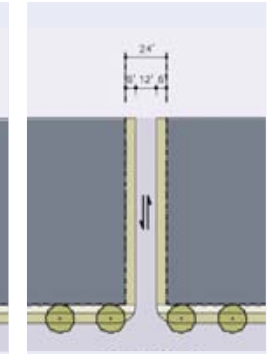

	AV-80-40	ST-60-34	ST-50-28	DR-50-28	RD-50-20	RA-24-24	RL-24-12
Type	Avenue	Street	Street	Drive	Road	Rear Alley	Rear Lane
Movement	Free Movement	Free Movement	Free Movement	Free Movement	Free Movement	Free Movement	Free Movement
Traffic Lanes	Two One-Ways	Two Ways	One One-Way	Two Ways	Two Ways	Two Way	Two Way
Parking Lanes	Both Sides marked	Both Sides @ 20 feet marked	Both side @ 20 feet marked	One side @ 8 feet marked	N/A	N/A	N/A
R.O.W. Width	80 feet	60 feet	50 feet	50 feet	50 feet	24 feet	24 feet
Pavement Width	40 feet	34 feet	28 feet	28 feet	20 feet	24 feet	12 feet
Curb Radius	15 feet	10 feet	15 feet	10 feet	10 feet	5 feet	5 feet
Vehicular Design Speed	25 MPH	25 MPH	25 MPH	25 MPH	25 MPH	15 MPH	15 MPH
Pedestrian Crossing Time	4.5 seconds	TBD	TBD	TBD	TBD	TBD	TBD
Sidewalk Width	5 feet	5 feet	5 feet	5 feet	5 feet	N/A	N/A
Planter Width	7' continuous planters	8' continous planters	7' continous planters	7 feet	7 feet	N/A	N/A
Road Edge Treatment	Curb	Curb	Curb	Curb	Curb	N/A	N/A
Planting	Trees at 30' o.c. Avg.	Trees at 30' o.c. Avg.	Trees at 30' o.c. Avg.	Trees at 30' o.c. Avg.	Trees at 30' o.c. Avg.	N/A	N/A

© 2005 Duany Plater-Zyberk & Company; for illustrative purposes only; Revision Date: 12-8-05